

LASER LEVELER

Salient Feature:

- Finest Touch Control for easy working.
- Over voltage and Reverse DC polarity protection.
- Field-Programmable Slope only for (ONSS System).
- All operations on control panel.
- Laser Level accuracy 1 mm at 30 meter & Battery backup for 3 days (depends upon uses)
- Laser land leveler working under high temperature and magnetic field.
- High power laser beam working up to 900 meters.

BEST
WATER
MANAGEMENT
SOLUTION



LASER LEVELER



WALK AROUND LASER LEVELER

TECHNICAL SPECIFICATION

PARAMETERS	DIMENSIONS
Bucket (mm)	2110 (W) x 925 (B) x 545 (H)
Main Sheet Thickness (mm)	1
Side Sheet Thickness (mm)	10
Reversible Main Blade, Alloy Steel (mm)	2100 x 115 x 12
Reversible Side Plate Blade, Alloy Steel (mm)	746 x 115 x 12
Tyre Size	6 x 16
Tyre Make	Mrf
Hydraulic Cylinder	Double Acting
Hydraulic Cylinder Capacity	6 metric Tonne
Weight (Kg)	820 kg (with tripod)

*The Product & Specifications are subject to change/discontinue without any notice on the sole discretion of manufacturer.



LASER
TRANSMITTER





RECEIVER



CONTROL
PANEL



HYDARULIC
SYSTEM

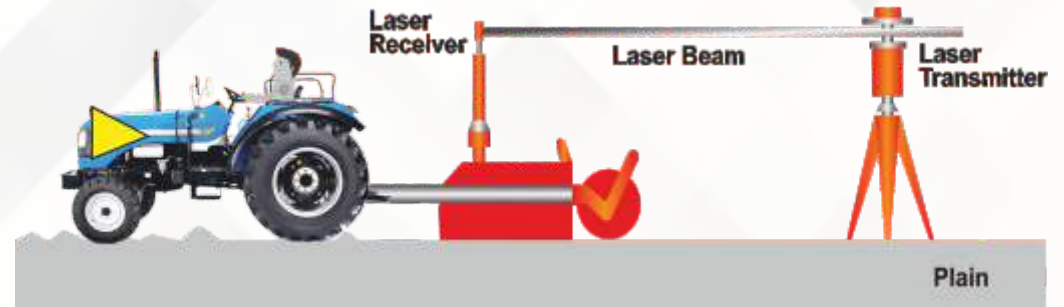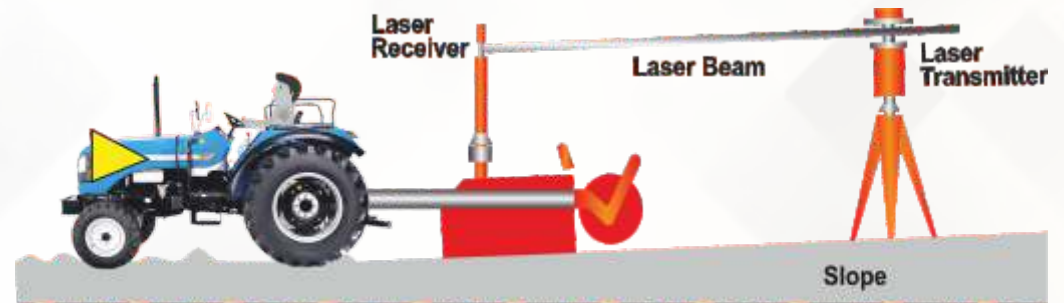

ABOUT

Laser Leveler is a tractor operated precision land levelling equipment intended for judicious and efficient utilization of water. It will not only conserve water, save electricity and time but will also improve judicious use of other agricultural inputs like fertilizers, insecticides, pesticides & weedicide etc.

AVAILABLE FROM 7 TO 10 FEET SIZE

SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur- 146 022 (Pb.), India

Phone: +91 99149-34522, +91 1882-501320 | Email: info@sonalikaindustries.com | Website: www.sonalika.com/agrosolutions

Auth. Dealer