

**ULTRA LIGHT WEIGHT**  
for **WET LAND**  
application



# PADDYVATOR

ROTARY TILLER

- Specially designed C type blades for Puddling operation
- Duo cone waterproof seal
- Long lasting powder coated paint
- Floating type depth skid
- Ultra light weight
- Multi speed gear box for better pulverization effect



**WORLD'S NO. 1**  
**HEAVY DUTY RANGE**


## TECHNICAL SPECIFICATIONS



Du cone mechanical oil seals  
Ideal for wet land operation



Heavy duty bearings  
6311 and 6309



Helical arrangement of blades ensures less  
load on tractor & lesser fuel consumption.




Heavy duty trailing board.



Robust structure for heavy  
vibration free field operation.



Oil immersed side bearing.

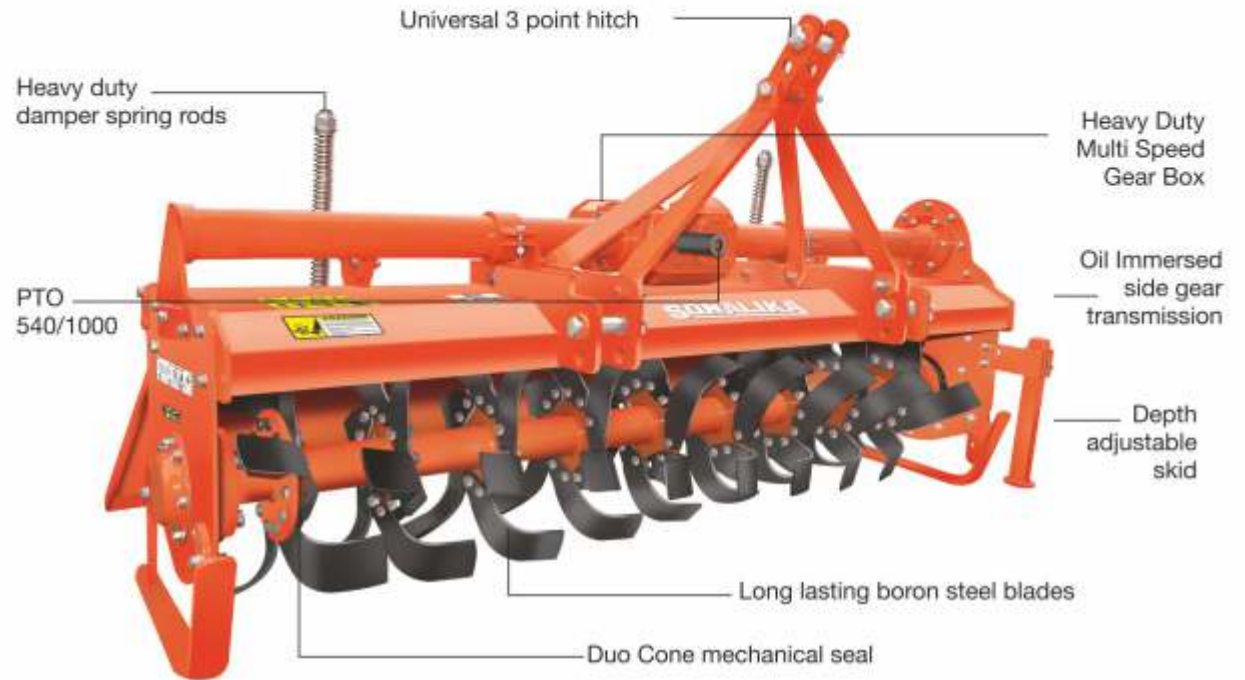

		PADDYVATOR	
B	A	20 -	
		35 -	
		28 -	
A	B	540 r.p.m.	
17	19	179	
19	17	224	

Model	Work Width		Total Width		Weight in Kg. Approx.	Gear Box	Side Transmission	PTO Speed RPM	No. of Blades	Type of Blade	HP
	Inch	cm	Inch	cm							
SLPSMSR-5.5	65	165	70	178	325	Multispeed	Gear	540	48	C	40+
SLPSMSR-6	73	185	78	198	342	Multispeed	Gear	540	54	C	45+
SLPSMSR-7	81	206	86	218	360	Multispeed	Gear	540	60	C	50+

\*The Product & Specifications are subject to change/discontinue without any notice on the sole discretion of manufacturer.

**WORLD'S NO. 1**  
**HEAVY DUTY RANGE**

# SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur -146 022 (Pb.), India

Tel.: +91 99149-34522, +91 1882-501320, Email: info@sonalikaindustries.com

Authorised Dealer

R0042544A